

# The 10A loudspeaker



## 10A loudspeaker

The 10A loudspeaker is a light-weight, high performance loudspeaker in a 2-way passive design using neodymium drivers. The loudspeaker is a array box solution employing a single 10" driver in a bass-reflex enclosure and a HF section with a large horn for accurate pattern control providing rotatable dispersion characteristics of 75° x 50°. It is equipped with a 1.4" exit compression driver.

With a frequency response extending from 60 Hz to 18 kHz, the cabinet can be used as full range systems or supplemented by different subwoofers of the xS or xA-Series.

The enclosures are constructed from marine plywood with an impact resistant black paint finish. The front of the cabinet is protected by a rigid metal grill backed by an acoustically transparent foam and is Ball Impact Resistant according to DIN 18032-3.

The cabinet is equipped with an integrated rigging system for the design of vertical arrays providing application specific dispersion characteristics.

## d&b amplifiers

The d&b audiotechnik loudspeaker range is designed exclusively for operation with d&b amplifiers. These provide power as well as comprehensive control and protection functions tailored to achieve the performance, reliability and longevity associated with the d&b system approach.


## System data

Frequency response (-5 dB standard) .....	60 Hz - 18 kHz
Frequency response (-5 dB CUT mode) .....	100 Hz - 18 kHz
Max. sound pressure (1 m, free field) .....	
with 10D/D6 .....	127 dB
with 30D/40D/D12/D20/D40/D80 .....	130 dB
.....(SPLmax peak, pink noise test signal with crest factor of 4)	

## Loudspeaker data

Nominal impedance .....	12 ohms
Power handling capacity (RMS/peak 10 ms) .....	200/1200 W
Nominal dispersion angle (hor. x vert.) .....	75° x 50°
Splay angle range .....	25° to 60° with 5° increments
Components .....	10" driver with neodymium magnet
.....	1.4" exit compression driver on rotatable CD horn
.....	Passive crossover network
Connections .....	2 x NL4
.....	1 x screw terminal (ST - up to 4 mm <sup>2</sup> /AWG 11)
.....	WR option: Faston type connector (2 x 6.3 mm)
Pin assignment .....	NL4: 1+/1-
.....	WR option: brown + / blue -
Weight .....	14 kg (31 lb)

# The 10A loudspeaker

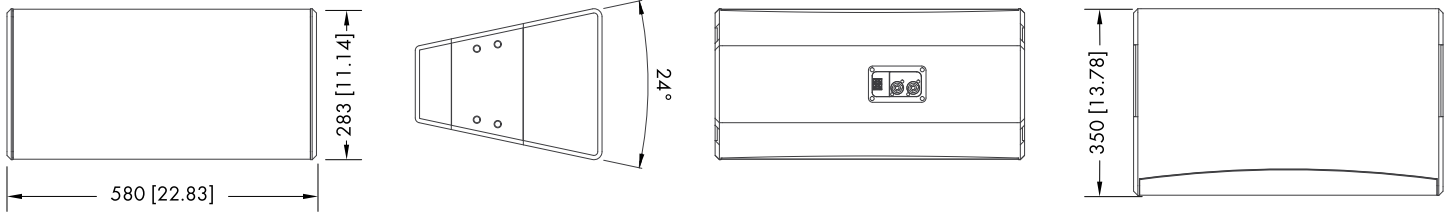

10A cabinet dimensions in mm [inch]

## Architectural specifications

The 2-way biaxial, passive loudspeaker shall consist of a 10" low frequency driver with a neodymium magnet assembly and a 1.4" neodymium compression driver mounted on a rotatable CD-Horn. The bass-reflex enclosure shall be made from marine plywood with an impact resistant black paint finish. Special colours according to RAL table and a weather resistant option shall be available upon request. The drivers shall be protected by a powder coated metal grill with an acoustically transparent foam.

The cabinet shall be Ball Impact Resistant according to DIN 18032-3 for schools and sports halls.

The cabinet shall be equipped with an integrated rigging system for the design of vertical arrays providing application specific dispersion characteristics.

The connection panel on the back shall be recessed and fitted with two NL4 sockets and a two pole screw terminal block. A cover plate for protection of the connection panel shall be included.

The loudspeaker shall only be operated by a dedicated, compatible controller amplifier.

The loudspeaker shall have a nominal dispersion angle of 75° x 50° (hor. x vert.).

The power handling capacity shall be 200 W RMS and 1200 W peak (10 ms). The frequency response (-5dB) measured on axis shall be 60 Hz to 18 kHz with a maximum sound pressure of at least 127 dB or 130 dB respectively when operated with one of its dedicated controller amplifiers. The dimensions (W x H x D) shall not exceed 580 x 283 x 350 mm (22.83" x 11.14" x 13.78") and shall weigh no more than 14 kg (31 lb).

The loudspeaker shall be the 10A by:  
d&b audiotechnik GmbH & Co. KG.